Quilt 2 END ALZ

2024 Block of the Month Pattern

CHARMWOOD

Finished Quilt Size: 58" x 68"

FABRIC REQUIREMENTS

Fabric A	2 yds
Fabric B	½ yd
Fabric C	⅜ yd
Fabric D	⅝ yd
Fabric E	¾ yd
Fabric F	⅝ yd
Fabric G	¾ yd
Backing	3¾ yds
Binding	⅝ yd

Add your fabric swatches here!

A

B

C

D

E

F

G

NOTE

- Please read through all instructions before you begin
- WOF = Width of Fabric, assumed to be at least 42" usable width
- RST = Right Sides Together
- Seam allowance is ¼" unless otherwise noted
- HST = half-square triangle
- QST = quarter-square triangle
- HRT = half-rectangle triangle

These instructions will cut all of the pieces needed for the entire quilt. The pieces needed for each month's block are listed in each block assembly section.

CUTTING INSTRUCTIONS

Fabric A	• (1) 5½" x WOF strip. Subcut: › (2) 5½" squares › (1) 5" x 10" rectangle › (4) 5" squares • (2) 5" x WOF strips. Subcut: › (4) 5" x 10" rectangles › (8) 5" squares • (3) 4½" x WOF strips. Subcut: › (1) 4½" x 12½" rectangle › (18) 4½" squares › (8) 3" squares • (2) 2½" x WOF strips. Subcut: › (1) 2½" x 20" strip › (2) 2½" x 4½" rectangles › (10) 2½" squares • (2) 1½" x WOF strips. Subcut: › (2) 1½" x 30" strips • (3) 2½" x WOF strips. Subcut: › (6) 2½" x 20½" block sashing pieces • (9) 2½" x WOF for row sashing and borders
Fabric B	• (1) 5¼" x WOF strip. Subcut: › (1) 5¼" square › (1) 5" x 10" rectangle › (2) 4½" x 9" rectangles • (1) 4½" x WOF strip. Subcut: › (1) 4½" x 9" rectangle › (4) 4½" squares › (2) 3" squares • (1) 2½" x WOF strip. Subcut: › (1) 2½" x 10½" rectangle › (1) 2½" x 5" rectangle › (10) 2½" squares
Fabric C	• (1) 5½" x WOF strip. Subcut: › (1) 5½" square › (1) 5¼" square › (5) 4½" squares • (1) 3" x WOF strip. Subcut: › (4) 3" squares › (4) 2½" x 4½" rectangles › (1) 2½" x 5" rectangle

CUTTING INSTRUCTIONS CONT.

Fabric D	• (1) 5¼" x WOF strip. Subcut: › (2) 5¼" squares › (1) 5" x 10" rectangle › (4) 5" squares • (2) 4½" x WOF strips. Subcut: › (10) 4½" squares › (8) 3" squares › (4) 2½" x 4½" rectangles • (1) 2½" x WOF strip. Subcut: › (10) 2½" squares
Fabric E	• (1) 5" x WOF strip. Subcut: › (1) 5" x 10" rectangle › (4) 5" squares • (2) 4½" x WOF strips. Subcut: › (1) 4½" x 20" strip › (9) 4½" squares • (2) 2½" x WOF strips. Subcut: › (1) 2½" x 20" strip (2) 2½" x 6½" rectangles › (4) 2½" x 4½" rectangles › (8) 2½" squares • (1) 1½" x WOF strip. Subcut: › (1) 1½" x 30" strip
Fabric F	• (1) 9" x WOF strip. Subcut: › (2) 9" x 8½" rectangles › (2) 9" x 4½" rectangles › (1) 5½" square › (1) 5" x 10" rectangle • (1) 4½" x WOF strip. Subcut: › (2) 4½" x 9" rectangles › (5) 4½" squares • (1) 2½" x WOF strip. Subcut: › (2) 2½" x 6½" rectangles › (9) 2½" squares
Fabric G	• (1) 5" x WOF strip. Subcut: › (1) 5" x 10" rectangle › (1) 4½" x 20" strip › (2) 4½" squares • (3) 4½" x WOF strips. Subcut: › (8) 4½" x 8½" rectangles › (4) 4½" squares › (2) 3" squares › (10) 2½" squares • (1) 1½" x WOF strip. Subcut: › (1) 1½" x 30"
Binding	• (7) 2½" x WOF strips

TECHNIQUES

These instructions illustrate the process that is used for all HST and Flying Geese units. Refer to each block instruction set for specific starting square sizes and trimming sizes.

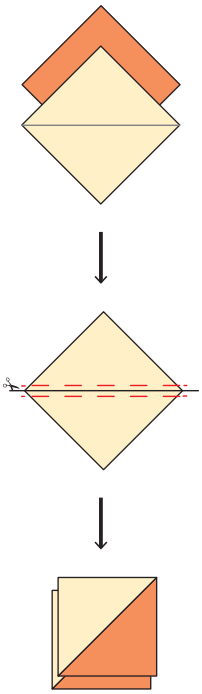

2-At-A-Time HSTs

1. Gather 2 squares, one in each fabric.
2. Draw a diagonal line from corner to corner on the wrong side of one square.
3. Place squares RST.
4. Sew ¼" on either side of the drawn line.
5. Cut along the drawn line to create 2 identical HST units.
6. Press seams open or toward the darker fabric as desired.
7. Trim HSTs to specified size.

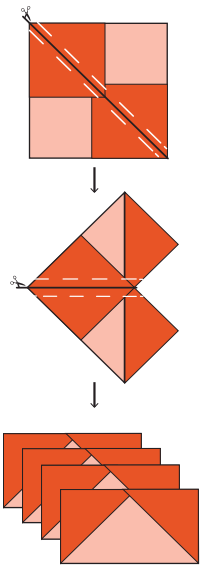

4-At-A-Time Flying Geese

1. Gather 1 large square and 4 small squares.
2. Draw a line from corner to corner on the wrong side of all small squares.
3. Align 2 small squares RST on opposite corners of the large square. The small squares will overlap slightly in the middle.
4. Sew ¼" on either side of the drawn line.
5. Cut along the drawn line to create two heart-shaped units. Press seams toward the small triangles.
6. Place another small square RST with the bottom corner of each heart unit. *Note: Pay attention to the orientation of the drawn line.*
7. Sew ¼" on either side of the drawn line on both units.
8. Cut along the drawn lines to create four flying geese units. Press seams toward the small triangles.
9. Trim Flying Geese units to specified size. *Note: When trimming, be sure to leave ¼" seam allowance between the point of the center triangle and the edge of the block.*